

## All-Flash and Hybrid Flash in One Storage System

Flash storage has the power to fundamentally transform how you do business. But most solutions force you to compromise on performance, price, or features. The Tintri IntelliFlash T-Series intelligent infrastructure is a fourth-generation storage solution that delivers an exceptional user experience through automation, analytic insights, and a variety of time-saving management features to drive your most valuable workloads in today's data centers.

Combining the performance of flash with the economics of disk and multi-protocol flexibility at scale, IntelliFlash T-Series systems offer a wide product portfolio – all built on a common operating environment. Analytics for IntelliFlash enables you to quickly and easily monitor the health, performance, and usage of all your IntelliFlash systems. While comprehensive data services and management capabilities deliver new levels of efficiency, simplicity, and cost savings.

With IntelliFlash T-Series you can hyper-consolidate multiple mixed workloads onto a single all-flash or hybrid storage systems. These systems easily fit into any data center - whether you require the high performance of flash, the high capacity of disk or a combination of both. You get simple, intelligent infrastructure that delivers an exceptional user experience. Experience different!


## Features

- Cloud-Based Intelligent Analytics – Visibility across all IntelliFlash systems, with insights that keep infrastructure operating at peak efficiency and availability
- Live Dataset Migration – Seamless live migration of iSCSI/FC LUNs across IntelliFlash systems
- IntelliFlash S3 Cloud Connector – Hybrid cloud capabilities, enabling connectivity to public cloud or any S3-compatible object storage
- Sustained Performance – High throughput at low latency for mixed workloads
- Comprehensive Data Services – Inline deduplication and compression, snapshots, read/write clones, and thin provisioning
- Affordable Disaster Recovery – Replicate between NVMe-flash, SAS-flash, and hybrid systems
- VMware® Support – vCenter® plug-in and integration with VMware SRM and VAAI
- Microsoft Hyper-V Support – PowerShell Toolkit plus SMB3 Enhancements for Hyper-V

## Benefits


- Simplified Management and Analytics – Common GUI across all IntelliFlash systems
- High Capacity and Scalability – Over 5PB<sup>†</sup> of effective all-flash or hybrid expansion capacity in a compact 10RU footprint
- Unified Storage – Native concurrent block (FC, iSCSI) and file (NFS, SMB3) access
- Multiple Mixed Workloads – Support bare metal applications along with certified configurations for Oracle, Microsoft, VMware and many other environments.
- Hybrid Cloud – Back up local snapshots to the cloud or quickly migrate volumes for bring-up on the public cloud or any S3-compliant object storage.
- Performance You Want – IntelliFlash T-Series confidently handles critical workloads.
- Capacity You Need – Without compromising on performance
- Reduced OPEX – With a platform that is energy efficient, offers inline data reduction, and is easy to maintain, so you can save on power, cooling, and labor

## T-Series All-Flash: The Workhorse for Your Applications



- Delivers consistent sub-millisecond latency for any workload and I/O block size with SAS-based flash
- Application-aware, simple, and flexible storage management bolstered by analytics and environment-wide insight
- Multi-parity RAID protection options for maximum resilience

## T-Series Hybrid Flash: Bringing Performance to More Workloads

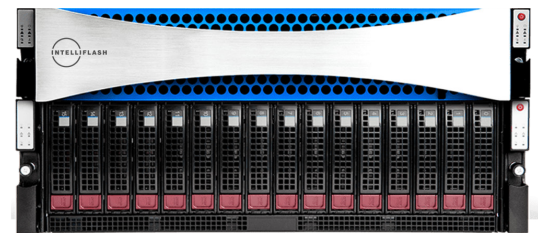

- Favor flash for more performance in your optimized flash-to-disk ratio
- Application-aware and easy-to-manage with the shared IntelliFlash Operating Environment
- Native data reduction boosts economics for secondary workloads

# IntelliFlash T-Series All-Flash Systems Specifications

Models	T4600	T4700	T4800
<b>Storage Capacity</b>			
RAW Flash Memory (TB) †	11	23	46
Effective All-Flash Capacity (TB) ‡	43	86	170
<b>Performance</b>	Cost-effective all-flash performance for affordable primary storage		
<b>Physical</b>			
Form Factor	2U		
Weight (Lbs)	82lbs (37kg)		
Power (Watts) (Estimated)	495W (1690 BTU/hr)		
Physical Dimensions (HxWxD)	3.5" x 17.2" x 24.75" (89mm x 437mm x 628mm)		
<b>Network Connectivity</b>	16 & 8 Gbps Fibre Channel, 40GbE, 10GE Copper/Fiber & 1 Gbps Ethernet		
<b>Software Services</b>			
Block and File Protocols	SAN Protocols (iSCSI, Fibre Channel), NAS Protocols (NFS, SMB)		
Capabilities	IntelliFlash Operating Environment: Inline deduplication and compression, snapshots and clones, space efficient thin provisioning, remote replication, S3 Cloud Connector, Live Dataset Migration, data-at-rest encryption		
Management	IntelliFlash web UI, configuration wizard, cloud-based intelligent analytics, plug-in for VMware vCenter and support for vCenter Linked Mode, vCenter RBAC, SRA and VAAI NAS; Microsoft SCVMM/SMI-S, IP-KVM, SNMP, PowerShell Toolkit		
<b>Hardware Availability</b>	Redundant storage controllers, fans, power supplies, and network ports; removable SAS SSDs, SAS expansion		
<b>Warranty</b>			
Basic	24x7 support via email and phone, next business day hardware replacement for defective parts, and software updates for the first 90 days.		
Optional	Standard and Premier Service. Visit <a href="http://tintri.com/intelliflash">tintri.com/intelliflash</a>		

† Values indicated are RAW capacity. One MB is equal to one million bytes, one GB is equal to one billion bytes and one TB equals 1,000GB (one trillion bytes) when referring to storage capacity. Accessible capacity will vary from the stated capacity due to formatting and partitioning of the hard drives, the operating system and other factors.

‡ Effective capacity assumes capacity after dual-parity, data protection, and metadata overhead, and includes the benefit of data reduction with inline deduplication and compression. Data reduction is calculated at ratio of 5-to-1. Where a range is present, the values are Min – Max.

# IntelliFlash T-Series All-Flash Systems Specifications

Models	T4100	T4200	T4630	T4730	T4760	T4860
<b>Storage Capacity</b>						
RAW Flash Memory (TB) †	1.4 to 8.6	6 to 34	18	36	25.5	52
	26 to 159	159 to 1257	52	104	26	52
Effective All-Flash Capacity (TB) ‡	80 - 626	160 -1120	202	484	164	329
<b>Performance</b>	All-flash and hybrid flash performance with economics of hard disks					
<b>Physical</b>						
Form Factor	3U		5U	8U	5U	
Weight (Lbs)	80lbs (37kg) to 560lbs (255kg)		187lbs (85kg)	292lbs (132kg)	187lbs (85kg)	187lbs (85kg)
Power (Watts) (Estimated)	423W (1443 BTU/hr)	441W (1505 BTU/hr)	691W (2358 BTU/hr)	887W (3026 BTU/hr)	691W (2358 BTU/hr)	
Physical Dimensions (HxWxD)	Height 5.25" x 17.2" x 25.25" (134mm x 437mm x 642mm)		Height 8.75" x 17.2" x 24.75" (222mm x 437mm x 628mm)	Height 5.25" x 17.2" x 24.75" (134mm x 437mm x 628mm)	Height 8.75" x 17.2" x 24.75" (222mm x 437mm x 628mm)	
<b>Network Connectivity</b>	16 & 8 Gbps Fibre Channel, 40GbE, 10GE Copper/Fiber & 1 Gbps Ethernet					
<b>Software Services</b>						
Block and File Protocols	SAN Protocols (iSCSI, Fibre Channel), NAS Protocols (NFS, SMB)					
Capabilities	IntelliFlash Operating Environment: Inline deduplication and compression, snapshots and clones, space efficient thin provisioning, remote replication, S3 Cloud Connector, Live Dataset Migration, data-at-rest encryption					
Management	IntelliFlash web UI, configuration wizard, cloud-based intelligent analytics, plug-in for VMware vCenter and support for vCenter Linked Mode, vCenter RBAC, SRA and VAAI NAS; Microsoft SCVMM/SMI-S, IP-KVM, SNMP, PowerShell Toolkit					
<b>Hardware Availability</b>	Redundant storage controllers, fans, power supplies, network ports Removable SAS SSDs/HDDs, SAS expansion					
<b>Warranty</b>						
Basic	24x7 support via email and phone, next business day hardware replacement for defective parts, and software updates for the first 90 days.					
Optional	Standard and Premier Service. Visit <a href="http://tintri.com/intelliflash">tintri.com/intelliflash</a> for details.					

† Values indicated are RAW capacity. One MB is equal to one million bytes, one GB is equal to one billion bytes and one TB equals 1,000GB (one trillion bytes) when referring to storage capacity. Accessible capacity will vary from the stated capacity due to formatting and partitioning of the hard drives, the operating system and other factors.

‡ Effective capacity assumes capacity after dual-parity, data protection, metadata overhead, and includes the benefit of data reduction with inline deduplication and compression. Data Reduction is calculated at 5-to-1. Where a range is present, the values are Min – Max.



@tintri

www.tintri.com

info@tintri.com